


## ELECTRICAL TYPICAL VALUES

Model	Pm(W)	Tolerance	Imp(A)	Vmp(V)	Isc(A)	Voc(V)	$\eta$
DM220-M156-60	220W	0/+3%	7.50A	29.3V	8.10A	36.6V	13.57%
DM230-M156-60	230W	0/+3%	7.78A	29.6V	8.35A	36.8V	14.19%
DM235-M156-60	235W	0/+3%	7.88A	29.8V	8.47A	36.9V	14.50%
DM240-M156-60	240W	0/+3%	8.00A	30.0V	8.96A	37.0V	14.81%
DM245-M156-60	245W	0/+3%	8.11A	30.2V	9.08A	37.1V	15.11%
DM250-M156-60	250W	0/+3%	8.22A	30.4V	9.20A	37.2V	15.42%
DM255-M156-60	255W	0/+3%	8.33A	30.6V	9.35A	37.3V	15.73%

STC:Irradiance 1000W/m<sup>2</sup>, module temperature 25°C, AM=1.5


PACKAGING 1650(L)×992(W)×45(H)		
Container	20'GP	40'GP
Pieces per pallet	20	20
Pallets per container	12	28
Piece per container	240	560

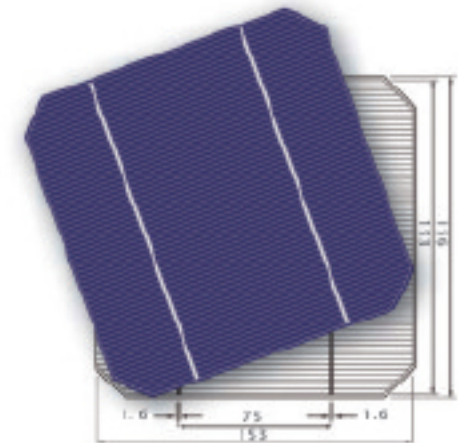

## WARRANTY

5 years manufacturing warranty, 10 years warranty, 90% power output  
25 years warranty, 80% power output

Current-Voltage&Power-Voltage Curve(220W)

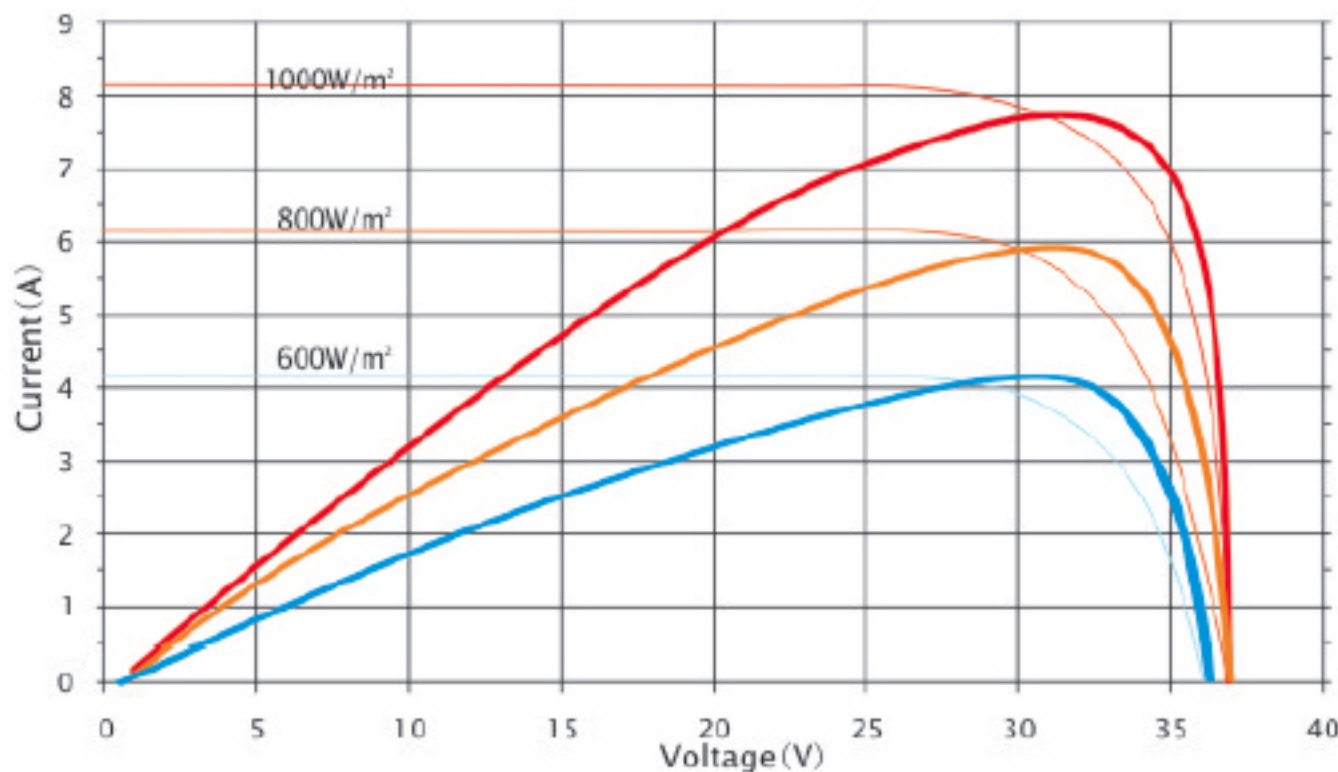

Temperature Dependence of Isc, Voc, Pmax

