


## ELECTRICAL TYPICAL VALUES

Model	Pm(W)	Tolerance	I <sub>mp</sub> (A)	V <sub>mp</sub> (V)	I <sub>sc</sub> (A)	V <sub>oc</sub> (V)	η
DM260-M156-72	260W	0/+3%	7.47A	34.8V	8.09A	44.0V	13.52%
DM270-M156-72	270W	0/+3%	7.71A	35.0V	8.14A	44.8V	14.04%
DM280-M156-72	280W	0/+3%	7.95A	35.2V	8.33A	44.8V	14.56%
DM285-M156-72	285W	0/+3%	8.00A	35.6V	8.51A	44.5V	14.82%
DM290-M156-72	290W	0/+3%	8.12A	35.7V	8.61A	44.6V	15.08%
DM295-M156-72	295W	0/+3%	8.24A	35.8V	8.71A	44.7V	15.34%
DM300-M156-72	300W	0/+3%	8.35A	35.9V	8.81A	44.8V	15.60%
DM305-M156-72	305W	0/+3%	8.47A	36.0V	8.91A	45.0V	15.86%

STC: Irradiance 1000W/m<sup>2</sup>, module temperature 25°C, AM=1.5

## PACKAGING


Container	20'GP	40'GP
Pieces per pallet	18	18
Pallets per container	10	22
Piece per container	180	396

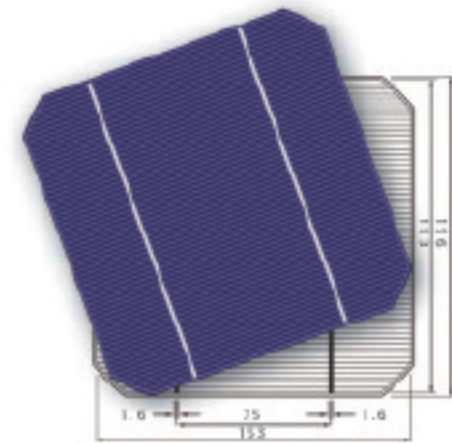

## WARRANTY

5 years manufacturing warranty, 10 years warranty, 90% power output  
25 years warranty, 80% power output

Current-Voltage & Power-Voltage Curve (260W)

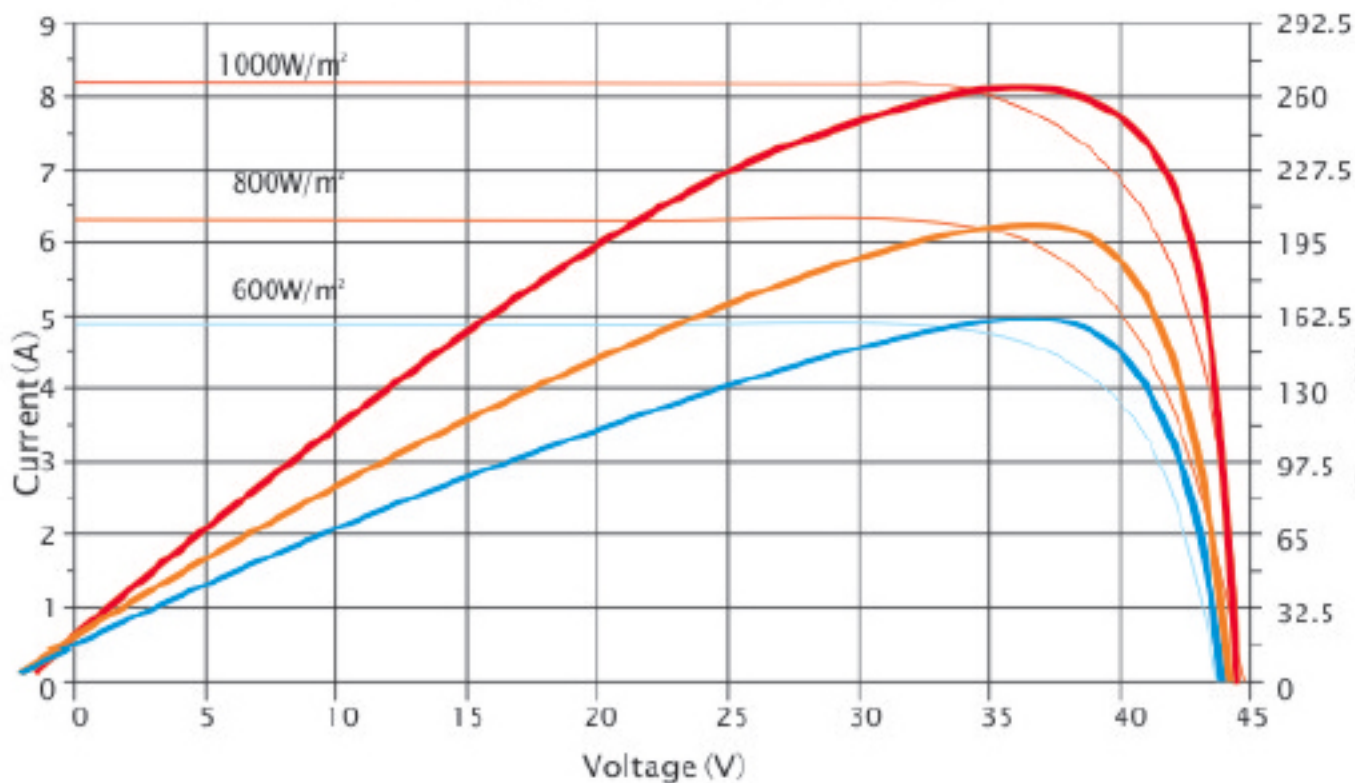

Temperature Dependence of I<sub>sc</sub>, V<sub>oc</sub>, P<sub>max</sub>

