


## ELECTRICAL TYPICAL VALUES

Model	Pm(W)	Tolerance	Imp(A)	Vmp(V)	Isc(A)	Voc(V)	$\eta$
DM260-P156-72	260W	0/+3%	7.47A	34.8V	8.09A	44.0V	13.52%
DM265-P156-72	265W	0/+3%	7.59A	34.9V	8.19A	44.1V	13.78%
DM270-P156-72	270W	0/+3%	7.71A	35.0V	8.20A	44.2V	14.04%
DM275-P156-72	275W	0/+3%	7.83A	35.1V	8.30A	44.3V	14.30%
DM280-P156-72	280W	0/+3%	7.88A	35.5V	8.41A	44.4V	14.56%
DM285-P156-72	285W	0/+3%	8.00A	35.6V	8.51A	44.5V	14.82%
DM290-P156-72	290W	0/+3%	8.12A	35.7V	8.61A	44.6V	15.08%
DM295-P156-72	295W	0/+3%	8.24A	35.8V	8.71A	44.7V	15.34%
DM300-P156-72	300W	0/+3%	8.36A	35.9V	8.81A	44.8V	15.60%

STC: Irradiance 1000W/m<sup>2</sup>, module temperature 25°C, AM=1.5

## PACKAGING


Container	20'GP	40'GP
Pieces per pallet	18	18
Pallets per container	10	22
Piece per container	180	396

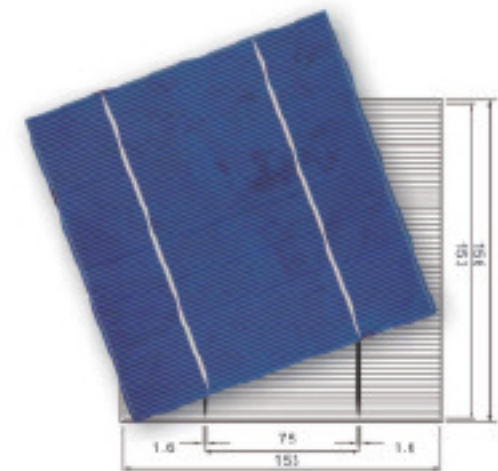

## WARRANTY

5 years manufacturing warranty, 10 years warranty, 90% power output  
25 years warranty, 80% power output

Current-Voltage & Power-Voltage Curve (260W)

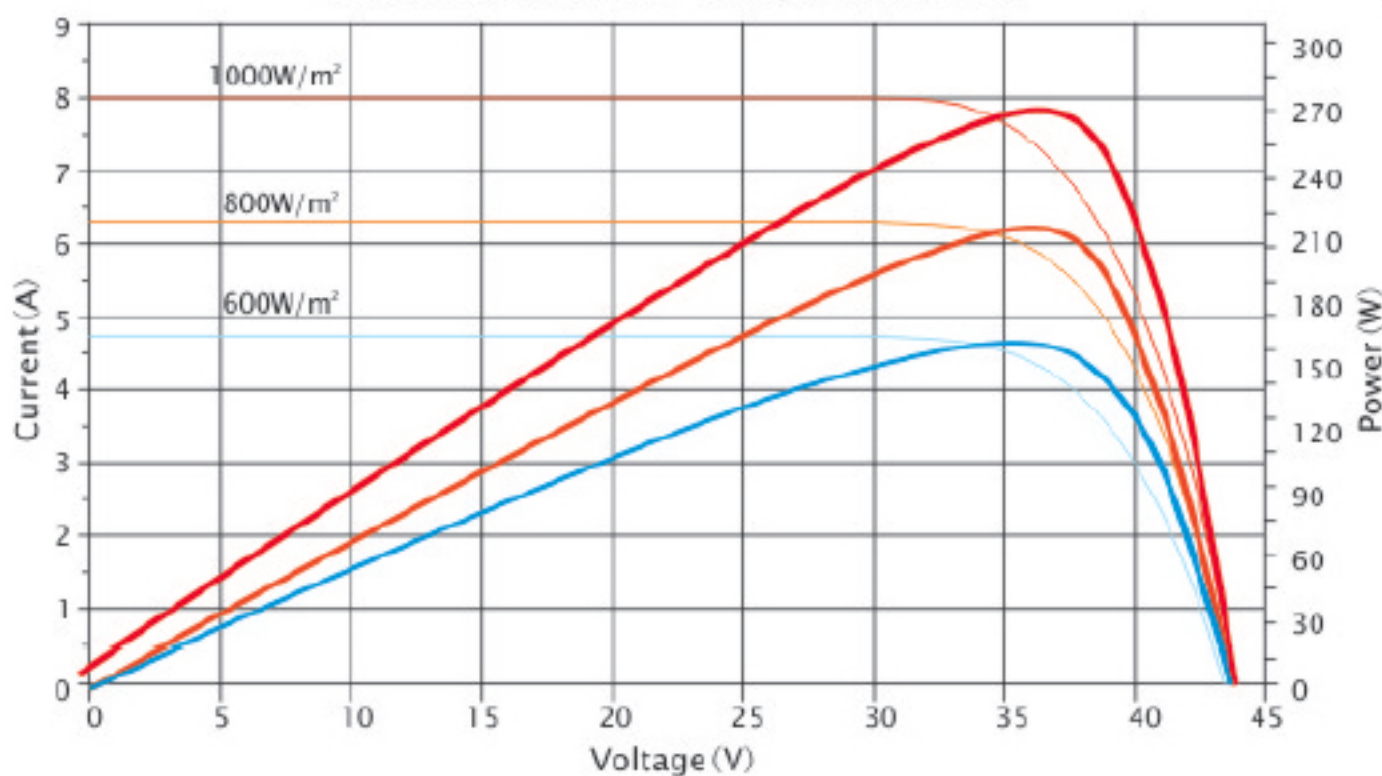

Temperature Dependence of Isc, Voc, Pmax

