


| ELECTRICAL TYPICAL VALUES | | | | | | | |
|---------------------------|-------|-----------|--------|--------|--------|--------|--------|
| Model | Pm(W) | Tolerance | Imp(A) | Vmp(V) | Isc(A) | Voc(V) | η |
| DM180-M125-72 | 180w | 0/+3% | 5.00A | 36.0V | 5.29A | 44.8V | 14.26% |
| DM185-M125-72 | 185w | 0/+3% | 5.09A | 36.4V | 5.43A | 45.0V | 14.66% |
| DM190-M125-72 | 190w | 0/+3% | 5.19A | 36.6V | 5.56A | 45.2V | 15.05% |
| DM195-M125-72 | 195w | 0/+3% | 5.3A | 36.8V | 6.05A | 45.8V | 15.45% |


STC: Irradiance 1000W/m^2 , module temperature 25°C , AM=1.5

| PACKAGING 1580(L) x 808(W) x 35(H) | | |
|------------------------------------|-------|-------|
| Container | 20'GP | 40'GP |
| Pieces per pallet | 28 | 28 |
| Pallets per container | 12 | 28 |
| Piece per container | 336 | 784 |

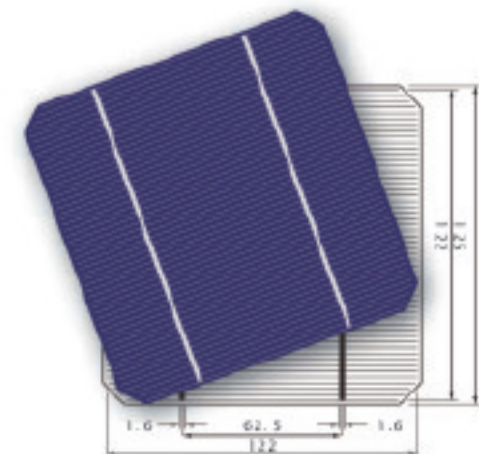

WARRANTY

5 years manufacturing warranty, 10 years warranty, 90% power output
25 years warranty, 80% power output

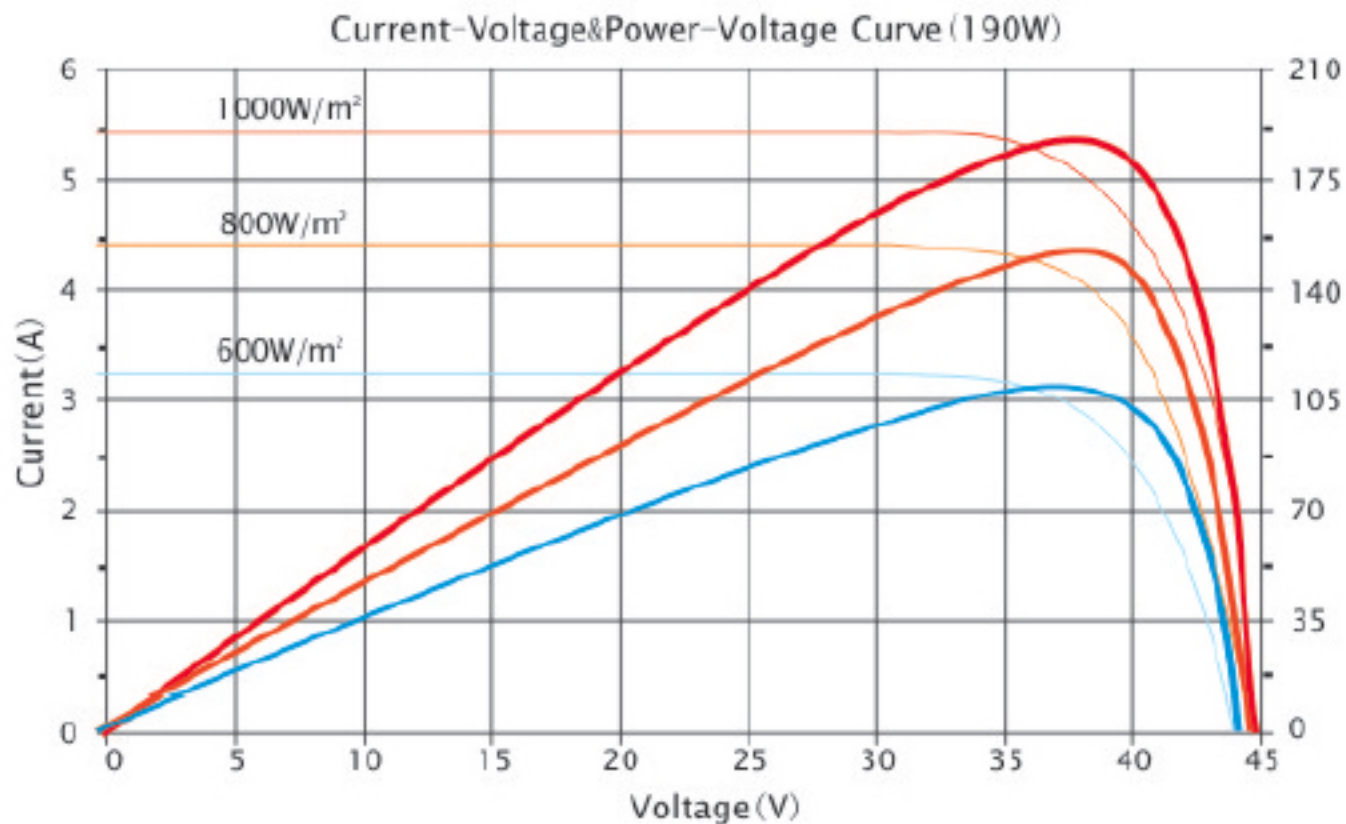

Temperature Dependence of Isc, Voc, Pmax

