


ELECTRICAL TYPICAL VALUES

Model	Pm(W)	Tolerance	I _{mp} (A)	V _{mp} (V)	I _{sc} (A)	V _{oc} (V)	η
DM200-P156-60	200W	0/+3%	6.94A	28.8V	7.67A	36.2V	12.34%
DM210-P156-60	210W	0/+3%	7.24A	29.0V	7.88A	36.4V	12.96%
DM215-P156-60	215W	0/+3%	7.39A	29.1V	7.99A	36.5V	13.26%
DM220-P156-60	220W	0/+3%	7.53A	29.2V	8.10A	36.6V	13.57%
DM225-P156-60	225W	0/+3%	7.65A	29.4V	8.25A	36.7V	13.88%
DM230-P156-60	230W	0/+3%	7.78A	29.6V	8.35A	36.8V	14.19%
DM235-P156-60	235W	0/+3%	7.89A	29.8V	8.47A	36.9V	14.50%
DM240-P156-60	240W	0/+3%	8.00A	30.0V	8.96A	40.0V	14.81%
DM245-P156-60	245W	0/+3%	8.01A	30.6V	9.08A	43.0V	15.11%

STC: Irradiance 1000W/m², module temperature 25°C, AM=1.5

PACKAGING 1650(L)×992(W)×45(H)


Container	20'GP	40'GP
Pieces per pallet	20	20
Pallets per container	12	28
Piece per container	240	560

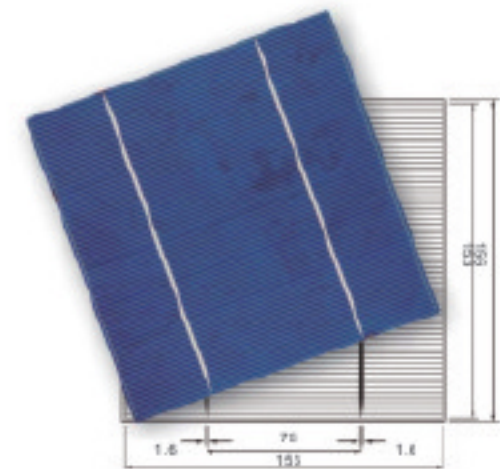

WARRANTY

5 years manufacturing warranty, 10 years warranty, 90% power output
25 years warranty, 80% power output

Current-Voltage&Power-Voltage Curve (200W)

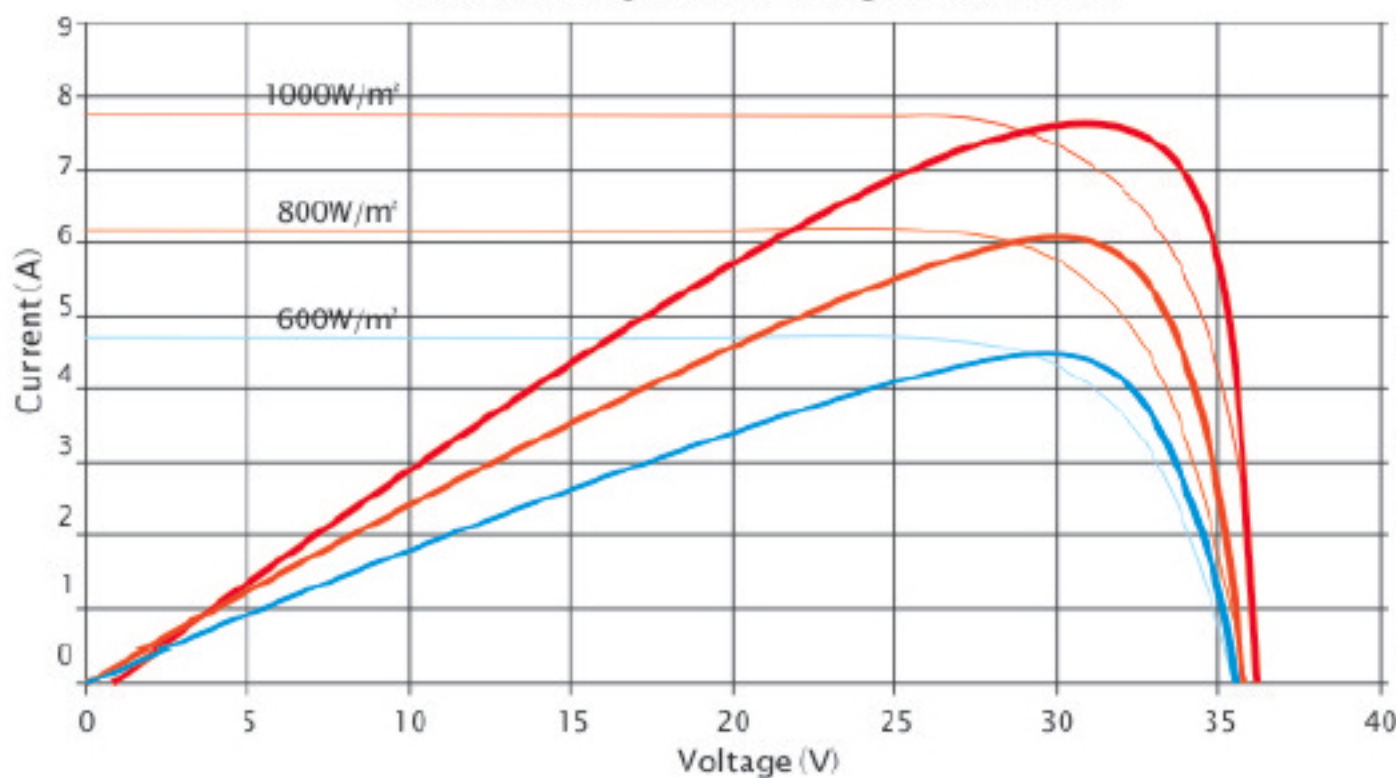

Temperature Dependence of I_{sc}, V_{oc}, P_{max}

